



Medium

## BESTBOY2 S3


All features of the original Bestboy in an updated design

The Safety Jogger BESTBOY2 is a mid-cut safety shoe with SR slip resistance, steel toecap and midsole, and breathable leather upper. Ideal for automotive, chemical, and mining industries.

|               |   |
|---------------|---|
| Upper         | Barton Action Leather   |
| Lining        | Mesh  |
| Footbed       | SJ foam footbed   |
| Midsole       | Steel   |
| Outsole       | PU/PU   |
| Toecap        | Steel   |
| Category      | S3 / SRC  |
| Size range    | EU 36-47 / UK 3.5-12.0 / US 4.0-13.0<br>JPN 22.5-31 / KOR 235-310 |
| Sample weight | 0.660 kg  |
| Norms         | ASTM F2413:2018<br>EN ISO 20345:2011                              |



210

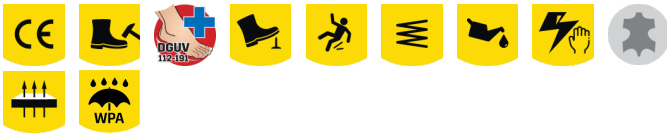

**DGVU BGR 191**  
These shoes are suitable for orthopedic insoles and orthopedic alterations. Certified according to BGR 191.



**S3**  
S3 safety shoes are suitable for work in an environment with high humidity and presence of oil or hydrocarbons. These shoes also protect against perforation risk of the sole, and foot crushing.



**SRC slip resistance**  
Slip resistant soles are one of the most important features of safety and occupational footwear. SRC slip resistant soles pass both SRA and SRB slip resistant tests, they are tested on both steel and ceramic surfaces.



**Steel toecap**  
Robust metal support to protect the feet of the wearer against falling or rolling objects.



**Steel midsole**  
Puncture resistant steel midsoles are made from stainless or coated steel and prevent sharp objects from penetrating the outsole.



**Breathable leather upper**  
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.

**Industries:**

Automotive, Chemical, Cleaning, Construction, Mining, Oil &amp; Gas, Industry

**Environments:**

Dry environment, Uneven surfaces, Wet environment

**Maintenance instructions:**

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

|                | Description  | Measure unit          | Result      | EN ISO 20345 |
|----------------|--|-----------------------|-------------|--------------|
| <b>Upper</b>   | <b>Barton Action Leather</b>                                     |                       |             |              |
|                | Upper: permeability to water vapor                               | mg/cm <sup>2</sup> /h | 2.2         | ≥ 0.8        |
|                | Upper: water vapor coefficient                                   | mg/cm <sup>2</sup>    | 25.0        | ≥ 15         |
| <b>Lining</b>  | <b>Mesh</b>  |                       |             |              |
|                | Lining: permeability to water vapor                              | mg/cm <sup>2</sup> /h | 67.6        | ≥ 2          |
|                | Lining: water vapor coefficient                                  | mg/cm <sup>2</sup>    | 541         | ≥ 20         |
| <b>Footbed</b> | <b>SJ foam footbed</b>   |                       |             |              |
|                | Footbed: abrasion resistance (dry/wet) (cycles)                  | cycles                | 25600/12800 | 25600/12800  |
| <b>Outsole</b> | <b>PU/PU</b>   |                       |             |              |
|                | Outsole abrasion resistance (volume loss)                        | mm <sup>3</sup>       | 68.5        | ≤ 150        |
|                | Outsole slip resistance SRA: heel                                | friction              | 0.36        | ≥ 0.28       |
|                | Outsole slip resistance SRA: flat                                | friction              | 0.38        | ≥ 0.32       |
|                | Outsole slip resistance SRB: heel                                | friction              | 0.13        | ≥ 0.13       |
|                | Outsole slip resistance SRB: flat                                | friction              | 0.18        | ≥ 0.18       |
|                | Antistatic value   | MegaOhm               | 129.3       | 0.1 - 1000   |
|                | ESD value  | MegaOhm               | N/A         | 0.1 - 100    |
|                | Heel energy absorption   | J                     | 28          | ≥ 20         |
| <b>Toecap</b>  | <b>Steel</b>   |                       |             |              |
|                | Impact resistance toecap (clearance after impact 100J)           | mm                    | N/A         | N/A          |
|                | Compression resistance toecap (clearance after compression 10kN) | mm                    | N/A         | N/A          |
|                | Impact resistance toecap (clearance after impact 200J)           | mm                    | 18.5        | ≥ 14         |
|                | Compression resistance toecap (clearance after compression 15kN) | mm                    | 20.5        | ≥ 14         |

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.