
SAFETY JOGGER
INDUSTRIAL

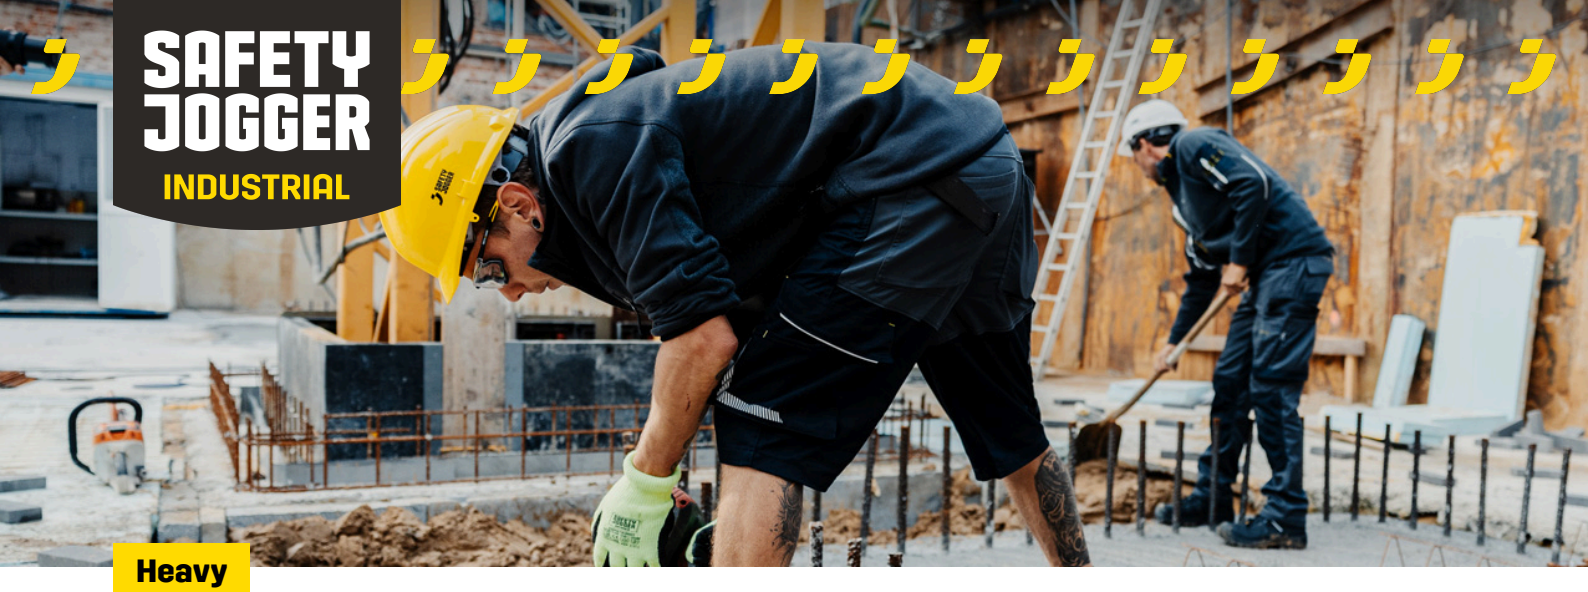

Heavy

VESUVIO S3 LOW

VESUVIOS3L

Safety Shoes With Breathable Leather

VESUVIO S3 is a robust safety shoe with breathable leather, self-cleaning outsole, and superior grip. Perfect for challenging industries and environments.

Upper	Crazy Horse Leather
Lining	Recycled 3D-Mesh (100% recycled)
Footbed	SJ Recycled Foam Footbed (96% recycled)
Midsole	Steel
Outsole	BASF PU/Rubber (NBR)
Toecap	Steel
Category	S3 / SR, SC, FO, HI, HRO, CI
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.720 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022

CE · WPA · HRO · 3FIT SYSTEM · NESKRID

CO_2 12.07 kg



BLK



DBN



Breathable leather upper
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



Oil & fuel resistant
The outsole is resistant against oil and fuel.



S3
S3 safety shoes are suitable for work in an environment with high humidity and presence of oil or hydrocarbons. These shoes also protect against perforation risk of the sole, and foot crushing.



SJ Foam
Removable comfortable antistatic footbed providing fit, guidance and optimum shock absorption in heel and forefoot. Breathable and moisture absorbing.



Heat resistant outsole (HRO)
The outsole resists high temperatures up to 300°C.



Scuff Cap (SC)
Separately tested material to cover the toe cap area to reduce abrasion of the upper material (e.g. during kneeling operations) and extend usability of the safety shoe.

Industries:
Construction, Industry, Mining, Oil & Gas, Tactical

Environments:
Cold environment, Muddy environment, Snowy and icy, Uneven surfaces, Extreme slippery surfaces, Wet environment, Dry environment

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

Test results:

	Description	EN ISO 20345	Result	Measure unit
Upper	**Crazy Horse Leather**			
	Upper: permeability to water vapor	≥ 0.8	5.3	mg/cm^2 /h
	Upper: water vapor coefficient	≥ 15	49.5	mg/cm^2
Lining	**Recycled 3D-Mesh (100% recycled)**			
	Lining: permeability to water vapor	≥ 2	103.5	mg/cm^2 /h
	Lining: water vapor coefficient	≥ 20	827.6	mg/cm^2
Footbed	**SJ Recycled Foam Footbed (96% recycled)**			
	Footbed: abrasion resistance (dry/wet) (cycles)	25600/12800	25600/12800	cycles
Outsole	**BASF PU/Rubber (NBR)**			
	Outsole abrasion resistance (volume loss)	≤ 150	95	mm^3
	Outsole slip resistance SRA: heel	≥ 0.28	0.35	friction
	Outsole slip resistance SRA: flat	≥ 0.32	0.38	friction
	Outsole slip resistance SRB: heel	≥ 0.13	0.15	friction
	Outsole slip resistance SRB: flat	≥ 0.18	0.21	friction
	Antistatic value	0.1 - 1000	150	MegaOhm
	ESD value	0.1 - 100	N/A	MegaOhm
	Heel energy absorption	≥ 20	28	J
Toecap	**Steel**			
	Impact resistance toecap (clearance after impact 100J)	N/A	N/A	mm
	Compression resistance toecap (clearance after compression 10kN)	N/A	N/A	mm
	Impact resistance toecap (clearance after impact 200J)	≥ 14	16	mm
	Compression resistance toecap (clearance after compression 15kN)	≥ 14	17	mm

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.

Carbon footprint:

	Description	Result	Measure unit
CO2 emission			
	Material	9.72	kg
	Packing	0.20	kg
	Manufacturing	1.90	kg
	Transport	0.26	kg
		12.07 kg CO2/pair	

	Description	Result
Recycled content		
	Product	7%
	Packing	18%

CO2 calculation:
Values are rounded to two decimals.
These analyses are performed using our in-house environmental calculators, developed within the Cortina Group. The CO2 values are valid at the time of calculation and may be subject to change.